

HexaDrain Brickslot is a recyclable polypropylene slotted trench drain system that provides effective, yet discreet, slot drainage in domestic paver or tile installation.

Cellular construction allows for simple “push-fit” of channels and accessories. Access to system for maintenance is through the removable cover on the corner unit.


Suitable for pedestrian/light vehicle traffic applications such as:

- Residential driveways
- Patios
- Walkways
- Doorways
- Pools



HexaDrain Brickslot


Product Overview

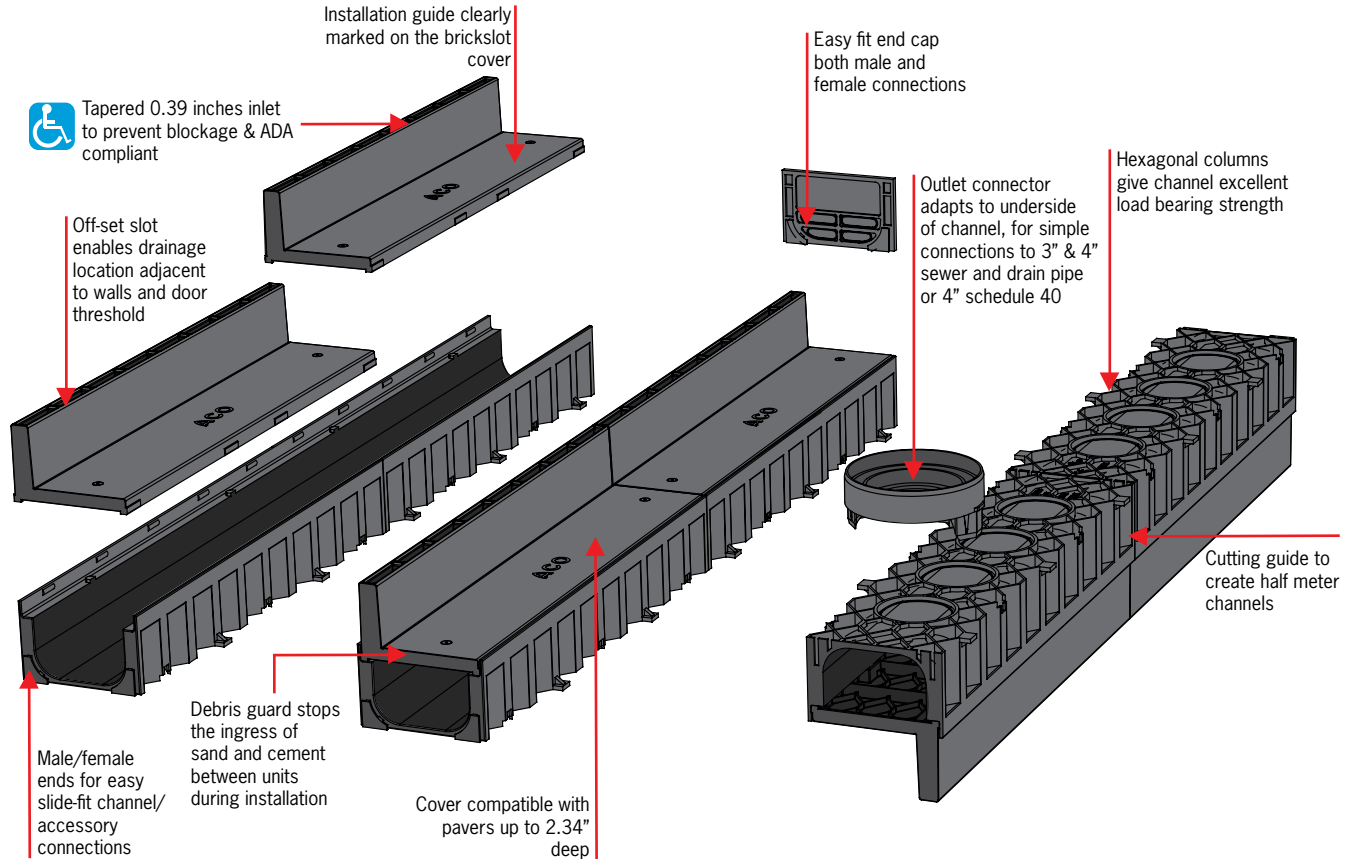

Part Table

	Part No.	Length inches	Width inches	Height inches	Wgt. lbs.
Black channel with black plastic slot cover	19555	39.4	4.8	5.4	3.9
Brickslot corner unit black	19560	4.8	7.2	0.8	
Accessory pack - 2 end caps, bottom outlet & leaf guard	19292	-	-	-	0.4

Installation Instructions

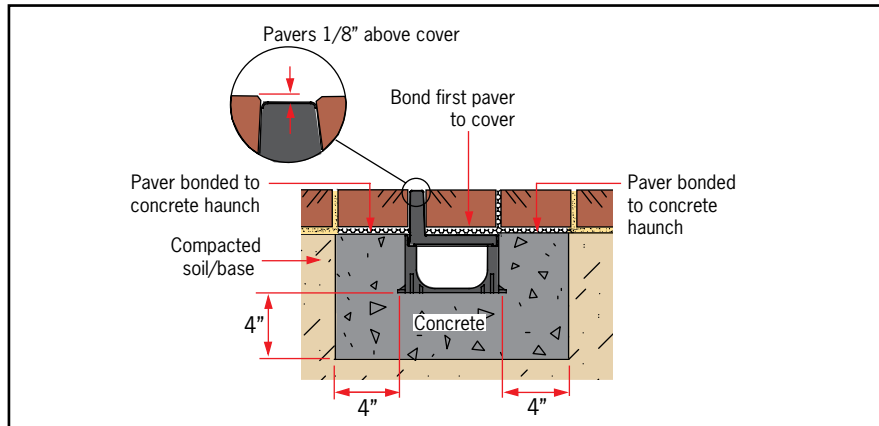

For driveway applications, trench drain **MUST** be surrounded by 4" of concrete.

Accessories

Corner unit :

Allows up to 4 channel connection. Use as access to outlet pipes for maintenance

* Requires 4" flex adaptor to fit to outlet pipe or use vertical bottom outlet adapter on channel



Accessory pack including:

2# - closing end caps



1# - vertical outlet



1# - leaf guard



Excavate area to accommodate trench drain and 4" concrete surround, compact base.



Lay 4" deep concrete bed. Cut channels to fit required length (if necessary).



Knockout channel base for outlet at required position.



Push-fit outlet adaptor into bottom of channel, lay outlet channel first and connect to 3" or 4" SDR pipe or 4" schedule 40. Alternatively, use 4" flex coupling to connect 4" SDR pipe to outlet on base of corner unit, set in place and lay channels from that point.

For pedestrian only applications, trench drain can be set directly on well compacted soil.



HexaDrain Brickslot is easily cut using a hacksaw. Channels have a half meter (19.69") cutting guide.



Lay remaining channels, units slide-fit together. Finish pavement/pavers must be an 1/8" higher than edges of drain. Bond pavers to cover and concrete haunch to prevent damage to slot when trafficked.

ACO Polymer Products, Inc.

East Sales Office

P.O. Box 245
Chardon, OH 44024
Tel: (440) 285-7000
Toll free: (800) 543-4764
Fax: (440) 285-7005

Southeast Sales Office

4211 Pleasant Road
Ft. Mill, SC 29708
Tel: (440) 285-7000
Toll free: (800) 543-4764
Fax: (803) 802-1063

West Sales Office

P.O. Box 12067
Casa Grande, AZ 85130
Tel: (520) 421-9988
Toll Free: (888) 490-9552
Fax: (520) 421-9899

Electronic Contact

info@acomarkant.com
www.acomarkant.com

Follow us on

