

# ACO Self

## Residential & Landscape Products

The HexaLine Garage Pack is a convenient set that makes installation and cleaning easy. The pack includes:

- 3 HexaLine plastic channels (2 grate styles available)
- 2 end caps
- Bottom outlet
- Leaf guard

HexaLine is a recyclable polypropylene trench drain system with a range of innovative features, making installation easier than ever.

The lightweight, cellular construction allows for a simple 'push-fit' of channels and accessories and makes cleaning and maintenance easy.

Suitable for pedestrian/light vehicle traffic applications such as:


- Residential driveways
- Patios
- Basements
- Pools



### Product Overview



Microgrip anti-slip texturing on plastic grates

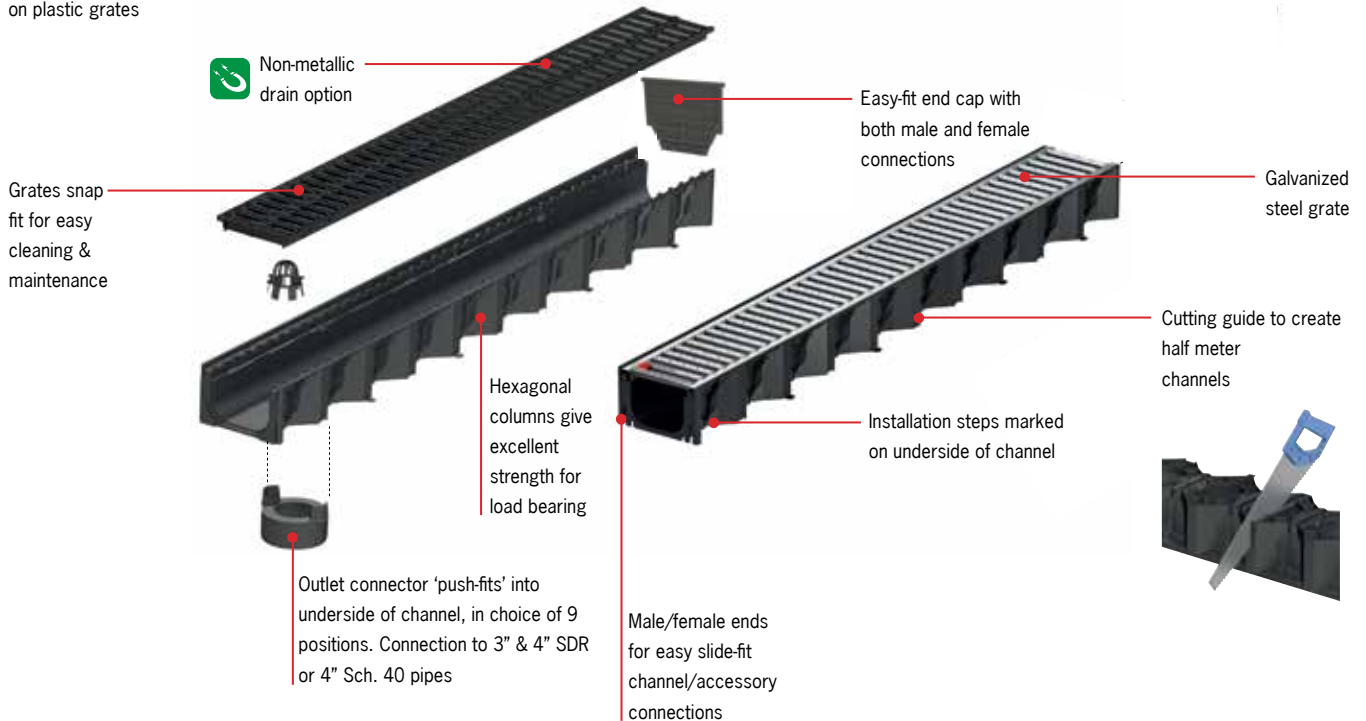

## Parts Table

	Part No.	Length inches	Width inches	Height inches	Wgt. lbs.
Garage Pack - black microgrip plastic grates*	<b>19305</b>	39.4	5.1	9.6	8.92
Garage Pack - galvanized steel grates*	<b>19309</b>	39.4	5.1	9.6	
Corner unit	<b>319560</b>	5.1	5.1	3.2	0.81
Accessory pack	<b>19303</b>	-	-	-	0.4


\*Pack includes 3 channels (39.4 in each).

## Each HexaLine Garage Pack comes complete with:

- 3 HexaLine channels (almost 10 ft in length)  
- choose either black microgrip or galvanized steel grates
- 2 closing end caps
- 1 bottom outlet
- 1 leaf guard



## Grate Options

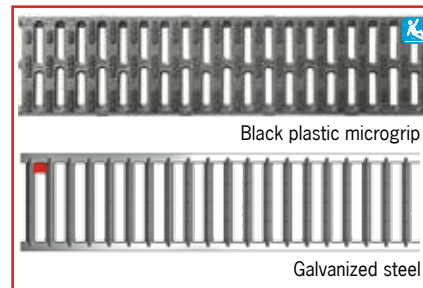

Black plastic microgrip

Galvanized steel

## Accessories

A full range of accessories are available for simple installation.

### Corner unit:

Allows up to 4 way channel connection



### Accessory pack includes:

- 2 - closing end caps
- 1 - bottom outlet
- 1 - leaf guard



## Installation Instructions



Excavate area to accommodate trench drain and 4" concrete surround.



Rough in 3" or 4" SDR pipe or 4" schedule 40 outlet pipe, compact excavation base and lay 4" deep concrete bed.




Knockout channel base for outlet and start to lay channels from outlet position.



Continue to lay channels working away from outlet, channels slide-fit together.



Pour 4" concrete around channel sides allowing for pavement detail (see section drawing above).

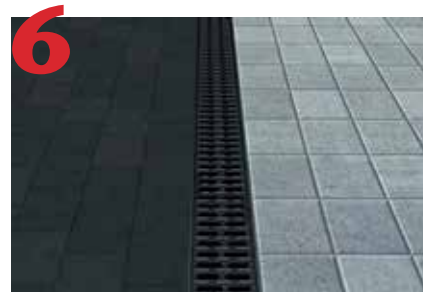

Finish pavement/pavers must be 1/8" higher than the grate.



For pedestrian **only** applications, trench drain can be set directly on well compacted soil. For driveway applications, trench drain **MUST** be surrounded by 4" of concrete.

## ACO Polymer Products, Inc.

### East Sales Office

9470 Pinecone Drive  
Mentor, OH 44060  
Tel: (440) 639-7230  
Toll free: (877) 553-9961  
Fax: (440) 639-7235

### Southeast Sales Office

4211 Pleasant Road  
Ft. Mill, SC 29708  
Toll free: (877) 553-9961  
Fax: (803) 802-1063

### West Sales Office

825 W. Beechcraft St.  
Casa Grande, AZ 85122  
Tel: (520) 421-9988  
Toll Free: (877) 553-9961  
Fax: (520) 421-9899

### Electronic Contact

info@acoself.com  
www.acoself.com

### Follow us on



© June 2015 ACO Polymer Products, Inc.

All reasonable care has been taken in compiling the information in this document. All recommendations and suggestions on the use of ACO products are made without guarantee since the conditions of use are beyond the control of the Company. It is the customer's responsibility to ensure that each product is fit for its intended purpose and that the actual conditions of use are suitable. ACO Polymer Products, Inc. reserves the right to change products and specifications without notice. Re-order \_\_\_\_\_.